



Conveyor chains with attachments

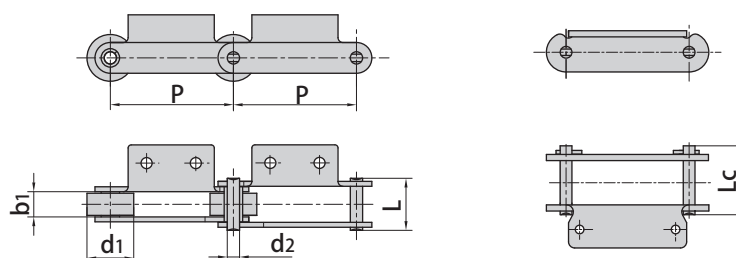

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P13.7K1	13.700	8.51	7.75	4.450	16.7	19.3	17.8/4000	20.0	0.79
P16.7F1K1	16.700	10.16	9.40	5.080	20.7	23.3	21.8/4900	24.0	1.50
*P28	28.575	11.68	16.00	7.870	-	32.4	50.0/11240	55.0	2.66
*P28F1	28.575	11.68	16.13	7.870	-	32.4	50.0/11240	55.0	2.60
P38F10K1	38.000	15.88	13.00	8.280	32.5	35.5	55.0/12364	60.5	2.60
P38F11K1	38.000	15.88	13.00	8.280	30.5	33.5	45.0/10116	49.5	2.30
P38.1F2	38.100	22.50	13.00	8.000	29.5	33.3	40.0/8992	44.0	2.42
P38.1F25A1	38.100	18.00	15.00	8.280	36.1	39.1	68.0/15287	75.0	3.00
P39.75A1	39.750	17.25	22.00	7.800	40.5	44.3	47.0/10566	51.7	3.10
P41.3F9A2	41.300	22.00	11.00	9.000	28.6	31.6	40.0/8992	44.0	2.30
P41.3F14A2	41.275	22.22	12.70	5.940	29.2	31.6	30.0/6744	33.0	2.22
P42F2	42.000	11.00	13.00	6.000	30.0	32.5	50.0/11240	55.0	1.85
P42.5	42.500	15.88	15.75	7.920	32.7	36.5	56.7/12746	62.0	3.40
P44F3A2	44.000	15.88	17.02	8.280	36.1	39.1	60.0/13488	66.0	2.32
P44.45F5	44.450	25.40	16.51	7.920	36.2	38.9	35.0/7874	38.5	3.85
P44.45F7A1	44.450	28.58	15.00	9.530	34.5	38.7	45.0/10116	49.5	3.80
P46	46.000	16.00	16.00	8.000	36.0	39.0	55.0/12364	60.5	3.23
P49F2A1	49.000	31.00	23.00	9.800	36.6	42.0	40.0/8992	44.0	5.51
P50F16	50.000	24.90	10.70	7.800	26.6	28.8	33.0/7418	36.3	2.22
P50F27A1	50.000	31.00	15.00	9.800	36.6	42.0	40.0/8992	44.0	5.30
P50.8F22A1-F	50.800	32.00	15.00	11.700	39.0	43.0	50.0/11240	55.0	6.13
P50.8F35A1	50.800	25.00	12.57	5.940	25.9	29.0	31.8/7150	35.0	2.20
P69F4A1	69.000	30.00	12.50	9.530	30.0	34.0	45.0/10116	50.0	3.18
P75F6	75.000	16.00	16.00	8.000	-	41.0	32.0/7200	35.2	2.44
P75F8A2	75.000	31.80	16.00	8.000	-	41.0	32.0/7200	35.2	3.52
P75F8A2-F	75.000	30.00	16.00	8.000	-	41.0	32.0/7200	35.2	3.80
P75F20A1	75.000	40.00	22.00	12.000	47.0	52.0	90.0/20232	99.0	6.81
P75F23	75.000	28.00	24.40	11.100	-	61.5	140.0/31473	154.0	4.49
P75F27A2	75.000	45.00	22.00	11.000	-	51.4	62.3/14005	68.0	7.43
*P76F1K1	76.000	32.00	35.00	16.000	-	77.0	240.0/53954	265.0	12.10
P76.2F1	76.200	31.75	15.00	14.200	-	44.2	60.0/13488	66.0	4.45
P76.2F41K1	76.200	38.10	25.40	11.100	-	57.5	80.0/17984	88.0	7.40
P76.2F42K1	76.200	38.10	25.40	11.100	-	60.7	120.0/26977	132.0	7.94
P78.11F8	78.110	31.80	37.10	15.000	-	83.5	100.0/22480	110.0	12.05

*Bush chain: d1 in the table indicates the external diameter of the bush.

Conveyor chains with attachments

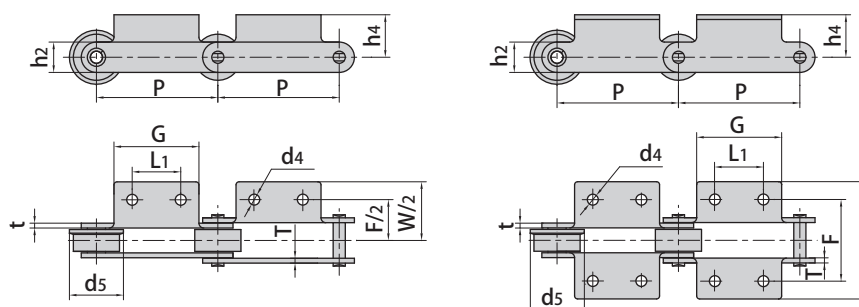


Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P13.7K1	13.700	△	9.50	29.00	38.70	7.10	11.80	4.50	1.60	-
P16.7F1K1	16.700	△	12.70	31.80	44.60	10.30	14.60	5.20	2.03	-
*P28	28.575	28.58	51.00	46.74	61.20	13.70	22.23	8.75	3.10	-
*P28F1	28.575	28.58	50.80	46.80	61.86	12.70	22.23	9.02	3.10	-
P38F10K1	38.000	△	30.00	49.00	79.00	16.50	21.00	8.40	3.5	-
P38F11F1	38.000	△	30.00	47.00	77.00	16.50	21.00	8.40	3.00	-
P38.1F2	38.100	△	28.00	56.00	76.00	17.20	19.00	9.00	3.00	-
P38.1F25A1	38.100	△	28.00	51.00	71.00	15.00	21.00	8.40	4.00	-
P39.75A1	39.750	△	61.00	62.10	94.10	16.50	21.25	11×8	3.50	-
P41.3F9A2	41.300	12.00	24.00	36.20	48.20	17.00	21.00	5.50	3.00	-
P41.3F14A2	41.275	14.30	28.60	42.90	61.20	14.70	17.50	5.20	3.25	-
P42F2	42.000	△	35.00	40.00	76.00	12.80	17.00	6.00	3.00	-
P42.5	42.500	19.00	38.00	53.50	70.00	19.50	22.00	7.00	3.25	-
P44F3A2	44.000	26.00	44.00	50.80	68.00	19.10	21.00	6.60	4.15/3.1	-
P44.45F5	44.450	△	34.93	57.16	74.46	19.05	19.05	8.00	3.80	-
P44.45F7A1	44.450	△	22.00	66.00	84.80	12.80	25.60	7.00	3.00	-
P46	46.000	△	38.00	54.00	82.80	18.00	22.00	6.00	4.00	-
P49F2A1	49.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P50F16	50.000	△	41.30	45.00	61.40	36.00	20.00	6.50	3.00	-
P50F27A1	50.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P50.8F22A1-F	50.800	△	45.00	75.00	110.40	20.00	26.40	9.00	4.50	40.00
P50.8F35A1	50.800	△	48.00	46.00	68.00	26.00	18.00	8.00	2.50	-
P69F4A1	69.000	△	60.00	60.00	80.00	27.00	25.00	9.00	3.00	-
P75F6	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.00	-
P75F8A2	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	-
P75F8A2-F	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	38.00
P75F20A1	75.000	△	55.00	64.00	92.00	25.00	32.00	M8	4.50	50.00
P75F23	75.000	40.00	60.00	88.00	118.00	37.00	30.00	9.00	6.00	-
P75F27A2	75.000	35.00	60.00	70.00	110.90	22.00	32.00	10.00	4.5/4.0	-
*P76F1K1	76.000	△	50.00	109.20	149.20	35.00	50.00	11.00	6.00	-
P76.2F1	76.200	31.00	58.00	75.40	107.00	21.25	29.00	10.50	4.50	-
P76.2F41K1	76.200	△	51.00	75.00	100.00	39.55	30.20	8.60	4.80	-
P76.2F42K1	76.200	△	50.80	74.60	101.60	20.60	28.60	8.70	4.80/6.4	-
P78.11F8	78.110	30.00	65.00	120.00	150.00	35.00	38.10	12.00	7.90	-

△ Attachments with 1 hole

*Bush chain: d1 in the table indicates the external diameter of the bush.


Conveyor chains with attachments

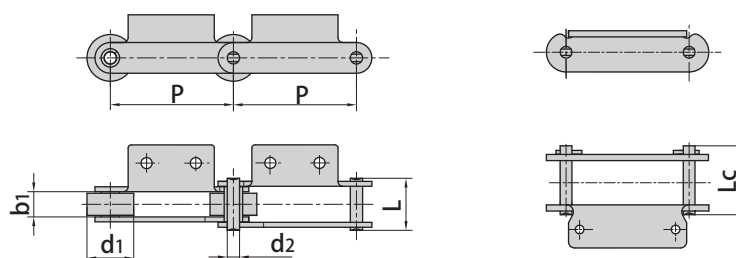

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	Q min kN/lbf	Q0 kN	q kg/m
P78.11F9	78.11	31.75	38.10	15.875	-	90.0	90.0/20232	99.0	11.28
P80F4	80.00	30.00	15.00	13.900	42.5	46.5	86.0/19333	95.0	3.97
P80F4-P	80.00	45.00	15.00	13.900	42.5	46.5	86.0/19333	94.6	5.67
P85A2F1	85.00	44.45	16.00	10.000	-	56.6	90.0/20232	100.0	6.80
P90F5A2	90.00	31.80	16.10	8.000	-	41.0	32.0/7193	35.0	2.86
P95F1A2	95.00	30.00	23.00	10.000	45.5	49.5	60.0/13488	66.0	3.79
P100A2-F1	100.00	50.00	29.90	14.000	-	61.0	150.0/33721	165.0	9.20
P100F1	100.00	42.00	23.00	9.530	52.0	54.3	86.7/19704	95.0	6.06
P100F2	100.00	36.00	18.00	9.530	47.0	49.3	86.7/19704	95.0	4.60
P100F3	100.00	29.00	30.00	14.500	-	71.0	95.0/21356	105.0	9.46
P100F4	100.00	40.00	22.00	11.300	-	53.5	65.0/14612	72.0	5.13
P100F4A2-F2	100.00	40.00	22.00	11.300	-	53.5	65.0/14612	72.0	5.92
P100F5	100.00	22.20	22.00	11.300	-	53.5	65.0/14612	72.0	3.90
P100F12	100.00	45.00	37.00	12.000	64.0	67.0	150.0/33721	165.0	10.30
P100F15	100.00	38.00	25.80	10.700	-	57.0	45.0/10116	50.0	5.25
P100F33	100.00	40.00	27.00	11.300	-	64.8	100.0/22480	110.0	6.80
P100F41A2	100.00	45.00	25.40	12.700	-	63.8	80.0/17984	88.0	8.26
P100F50	100.00	36.00	29.00	15.000	70.0	76.0	200.0/44992	220.0	13.93
P100F75	100.00	26.00	22.00	10.700	-	55.0	45.0/10116	50.0	4.75
P100F82A1	100.00	31.80	16.10	8.000	-	41.0	32.0/7193	35.2	3.07
P100F82A1-P	100.00	31.80	16.10	8.000	-	41.0	32.0/7193	35.0	3.07
P100F93	100.00	40.00	22.00	11.300	-	59.5	86.0/19333	94.6	8.07
P100F94K1	100.00	47.60	26.00	27.000	61.0	70.0	160.0/35993	176.0	12.90
P100F95A2	100.00	32.00	14.00	11.100	32.5	36.0	60.0/13488	66.0	3.11
P100F99K2	100.00	40.00	22.00	11.100	48.4	53.4	65.0/14612	71.5	5.54
P100F104	100.00	40.00	22.00	11.300	-	60.7	146.0/32822	160.6	7.33
P100F108K2	100.00	40.00	22.00	11.300	-	53.5	65.0/14612	71.5	5.80
P100F109A2	100.00	45.00	21.00	14.000	48.0	53.0	50.0/11240	55.0	6.94
*P100F128K2	100.00	32.00	45.00	16.000	-	95.0	240.0/53954	276.0	13.50
P100F143	100.00	40.00	24.00	11.300	-	53.5	65.0/14612	72.0	5.73
P100F148A2-F	100.00	38.00	20.50	9.530	43.6	47.9	38.0/8540	43.0	3.93
P100F101A2	100.00	22.20	24.00	11.100	57.5	62.7	70.0/15736	77.0	5.50
*P101.6F1	101.60	25.00	55.00	16.000	-	110.0	60.0/13488	66.0	11.90
P101.6F9	101.60	31.75	15.00	14.200	-	44.2	66.7/15159	73.0	8.40

*Bush chain: d1 in the table indicates the external diameter of the bush.

Conveyor chains with attachments

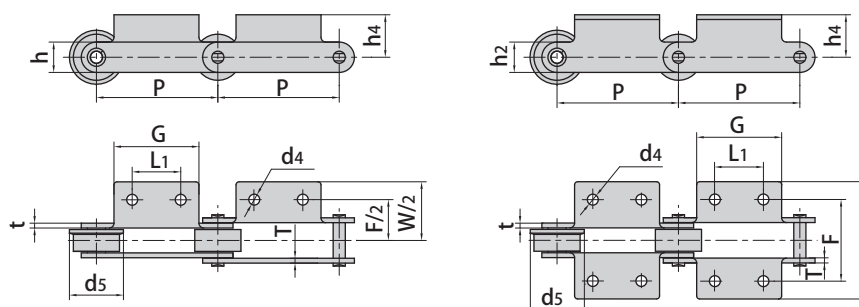


Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P78.11F9	78.11	38.10	116.60	104.60	133.30	31.75	38.10	14.30	7.90	-
P80F4	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	-
P80F4-P	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	-
P85A2F1	85.00	30.00	50.40	95.00	125.00	22.50	35.00	9.00	4.80	-
P90F5A2	90.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P95F1A2	95.00	40.00	65.00	66.40	96.40	22.50	25.00	8.50	4.00	40.00
P100A2-F1	100.00	40.00	65.00	98.00	128.00	35.00	40.00	10.00	4.00	65.00
P100F1	100.00	78.00	96.00	73.00	103.00	17.50	32.00	7.00	5.00	-
P100F2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	-
P100F3	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	-
P100F4	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P100F4A2-F2	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P100F5	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P100F12	100.00	60.00	90.00	98.00	128.00	34.00	40.00	11.50	5.00	64.00
P100F15	100.00	29.85	65.00	75.00	115.60	20.00	28.00	9.00	4.80	-
P100F33	100.00	40.00	65.00	78.30	102.30	24.30	32.00	10.00	6.00	50.00
P100F41A2	100.00	40.00	70.00	80.00	126.00	25.00	31.80	12.00	6.30	60.00
P100F50	100.00	40.00	70.00	156.00	196.00	43.00	60.00	9.00	8.00	-
P100F75	100.00	29.85	65.00	68.00	112.0	20.00	28.00	12×9	4.80	-
P100F82A1	100.00	△	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P100F82A1-P	100.00	△	65.00	60.00	92.00	20.00	22.00	10.00	3.20	31.80
P100F93	100.00	40.00	70.00	100.00	124.00	30.00	32.00	100.00	6.00	-
P100F94K1	100.00	△	35.00	85.00	116.00	38.50	55.00	13.00	7.00/5.00	-
P100F95A2	100.00	30.00	51.00	76.00	104.00	18.00	30.00	9.00	3.00	-
P100F99K2	100.00	40.00	65.00	70.00	104.00	22.00	32.00	9.50	4.80	-
P100F104	100.00	40.00	65.00	70.00	104.00	23.60	32.00	10.00	6.30	-
P100F108K2	100.00	40.00	65.00	70.00	94.00	35.00	32.00	10.00	4.50	-
P100F109A2	100.00	40.00	60.00	110.00	130.00	17.50	35.00	6.40	5.00	-
*P100F128K2	100.00	30.00	61.00	123.20	163.50	35.00	50.00	13.00	8.00	-
P100F143	100.00	40.00	65.00	70.00	100.00	35.00	32.00	11.00	4.00	50.00
P100F148A2-F	100.00	50.00	70.00	72.00	104.00	37.00	21.00	9.00	4.00	44.50
P100F101A2	100.00	41.00	65.00	86.00	134.00	24.50	33.00	9.00	6.00	-
*P101.6F1	101.60	44.00	73.00	136.00	165.00	30.00	40.00	11.00	10.00	-
P101.6F9	101.60	31.00	65.00	75.40	107.00	21.25	29.00	10.50	4.50	-

△Attachments with 1 hole

*Bush chain: d1 in the table indicates the external diameter of the bush.


Conveyor chains with attachments

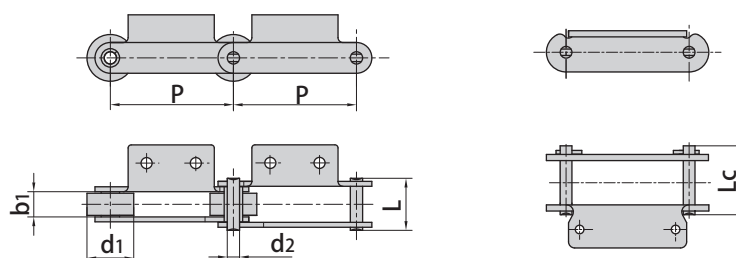

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*P101.6F17K2	101.6	25.40	55.60	15.880	-	115.0	180.0/40492	198.0	12.40
P101.6F18A1	101.6	31.75	15.00	10.000	37.0	41.0	56.0/12589	61.0	3.63
*P101.6F18A2	101.6	31.75	15.00	10.000	37.0	41.0	40.0/8992	44.0	3.66
P101.6F21	101.6	38.10	53.80	15.875	-	112.2	180.0/40492	198.0	14.90
P101.6F25	101.6	36.50	50.80	19.050	-	112.0	200.0/44992	220.0	18.10
P101.6F30A2	101.6	38.00	22.00	10.000	-	52.8	100.0/22480	110.0	5.19
P101.6F35	101.6	66.70	25.00	25.400	61.0	66.0	160.0/35993	176.0	15.73
P101.6F36	101.6	57.15	33.40	15.880	-	92.0	180.0/40492	198.0	14.33
P101.6F39	101.6	57.15	33.30	16.000	82.0	89.0	127.0/28550	140.0	17.70
P101.6F39K1F1	101.6	57.15	33.30	16.000	82.0	89.0	127.0/28550	140.0	16.60
P101.6F40A2	101.6	38.10	21.00	10.000	-	52.0	50.0/11240	55.0	4.69
P101.6F41K1	101.6	44.50	27.00	11.300	-	67.0	78.0/17546	86.0	10.20
P101.6F43A2	101.6	50.00	16.00	16.000	49.0	53.5	145.0/32620	160.0	7.95
P101.6F54K1	101.6	57.15	33.30	16.000	-	89.0	177.8/39998	197.4	17.86
P101.6F56K2	101.6	32.00	54.50	16.000	-	115.0	180.0/40493	199.8	16.51
P101.6F57K3	101.6	57.15	31.75	15.900	-	67.4	166.0/37343	191.2	13.90
P101.6F62K1	101.6	57.15	33.30	16.000	-	89.0	177.8/39998	197.4	18.83
P101.6F69K3	101.6	38.10	23.80	12.700	-	65.1	100.0/22480	110.8	8.34
P101.6F76	101.6	57.15	31.56	16.000	56.2	62.0	82.6/18582	91.7	11.57
P101.6F80A2	101.6	44.50	31.60	15.900	-	81.0	130.0/29245	144.3	11.36
P101.6F84A2	101.6	50.80	30.23	11.180	-	62.0	80.36/18078	89.2	9.04
P101.6F88	101.6	57.15	31.00	15.880	-	89.0	140.0/31473	160.0	18.40
P101.6F91A1	101.6	38.10	21.00	9.700	-	52.5	50.0/11240	55.0	5.30
P101.6F95K2	101.6	28.60	27.60	12.700	-	67.0	120.0/26977	132.0	6.65
P101.6F97K1	101.6	44.45	33.27	15.880	-	82.6	113.2/25448	125.0	13.77
P101.6F98K2	101.6	47.60	19.00	12.000	-	53.0	100.0/22480	110.0	6.60
P101.6F101K1	101.6	57.15	33.30	16.000	-	89.0	114.0/25628	125.0	17.70
P117	117.0	35.00	50.00	17.000	-	102.0	150.0/33721	166.5	13.40
P120	120.0	50.00	28.00	12.000	54.0	58.0	160.0/35993	176.0	8.14
P120A2F4	120.0	32.00	37.00	12.700	69.1	-	140.0/31473	155.4	9.00
P125F2	125.0	32.00	18.50	8.000	39.0	-	120.0/26977	132.0	2.66
P125F9A2	125.0	45.00	25.00	14.600	55.5	60.0	50.0/11240	55.0	2.58
P125F2K2-P	125.0	32.00	18.50	8.000	-	40.0	50.0/11240	55.0	2.83
P125F25K2-P	125.0	32.00	18.50	8.000	-	49.0	60.0/13488	66.0	4.00

*Bush chain: d1 in the table indicates the external diameter of the bush.

Conveyor chains with attachments

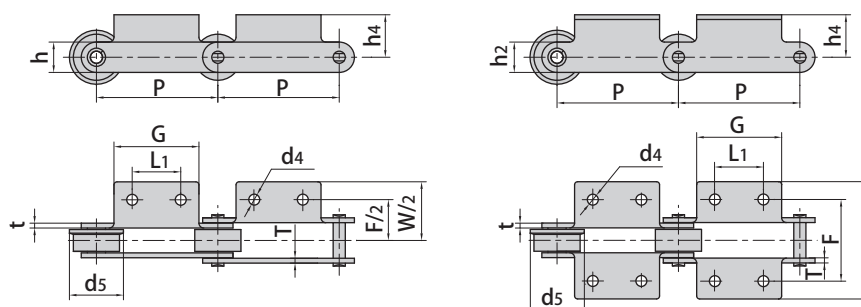


Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
*P101.6F17K2	101.6	44.50	84.0	136.0	172.0	25.40	38.00	11.00	10.00	-
P101.6F18A1	101.6	△	60.0	76.0	124.0	19.00	25.00	10.60	4.00	-
*P101.6F18A2	101.6	30.00	60.0	76.0	124.0	19.00	25.00	10.50	4.00	-
P101.6F21	101.6	44.50	141.2	134.9	177.8	28.70	38.10	14.00	9.65	-
P101.6F25	101.6	44.45	152.4	140.7	171.6	41.28	44.45	13.50	9.50	-
P101.6F30A2	101.6	40.00	70.0	80.0	107.0	22.00	30.00	11.50	5.00	-
P101.6F35	101.6	50.00	70.0	107.0	127.0	40.00	51.00	10.00	6.00	-
P101.6F36	101.6	△	50.8	98.4	142.9	32.00	38.10	14.30	9.50	-
P101.6F39	101.6	△	50.8	101.6	146.4	31.75	38.10	14.20	9.65	-
P101.6F39K1F1	101.6	△	38.1	101.6	138.2	33.30	38.10	14.20	9.65	-
P101.6F40A2	101.6	40.00	70.0	80.0	108.0	22.00	25.00	12.00	5.00	-
P101.6F41K1	101.6	△	70.0	100.0	128.0	28.00	28.60	12.00	6.30	-
P101.6F43A2	101.6	32.00	56.0	80.0	112.0	20.00	40.00	9.50	6.00	-
P101.6F54K1	101.6	△	50.8	101.6	146.4	31.75	38.10	14.20	9.65	-
P101.6F56K2	101.6	45.00	81.0	142.2	179.2	32.50	45.00	11×15	10.00	-
P101.6F57K3	101.6	50.80	82.6	101.6	132.5	36.50	44.45	10.3/15	6.40	-
P101.6F62K1	101.6	△	50.8	101.6	146.4	31.75	41.30	14.20	9.65	-
P101.6F69K3	101.6	38.10	68.0	69.9	103.2	22.20	33.00	10.30	6.40	-
P101.6F76	101.6	60.00	76.2	70.0	101.2	35.00	38.10	5.00	4.00	70.0
P101.6F80A2	101.6	40.00	80.0	110.0	146.0	35.00	38.10	15.00	8.00	-
P101.6F84A2	101.6	50.80	79.5	101.6	133.6	28.70	31.80	9.60	4.80	-
P101.6F88	101.6	44.45	71.0	101.0	142.5	31.75	39.50	11.00	9.50	-
P101.6F91A1	101.6	△	70.0	80.0	108.0	22.00	25.00	M10	5.00	-
P101.6F95K2	101.6	40.00	70.0	90.0	123.0	28.00	32.00	12.00	6.00	-
P101.6F97K1	101.6	△	76.2	92.0	134.8	25.40	38.10	14.20	7.90	-
P101.6F98K2	101.6	40.00	70.0	78.0	105.0	32.00	30.00	11.50	5.00	-
P101.6F101K1	101.6	△	50.8	101.6	146.4	31.75	38.10	9.70	9.65	-
P117	117.0	90.00	160.0	136.0	176.0	35.00	40.00	14.00	8.00	-
P120	120.0	50.00	75.0	82.0	119.6	20.00	40.00	7.00	5.00	59.0
P120A2F4	120.0	65.00	100.0	96.0	118.0	44.50	48.00	11.00	6.00	-
P125F2	125.0	46.00	76.0	64.0	90.0	14.00	22.00	10.00	3.00	42.0
P125F9A2	125.0	30.00	60.0	90.0	128.0	35.00	35.00	11.00	6.00/5.00	55.0
P125F2K2-P	125.0	46.00	76.0	64.0	90.0	14.00	22.00	10.00	3.00	-
P125F25K2-P	125.0	46.00	76.0	64.0	90.0	14.00	22.00	10.00	5.00	-

△Attachments with 1 hole


*Bush chain: d1 in the table indicates the external diameter of the bush.

Conveyor chains with attachments

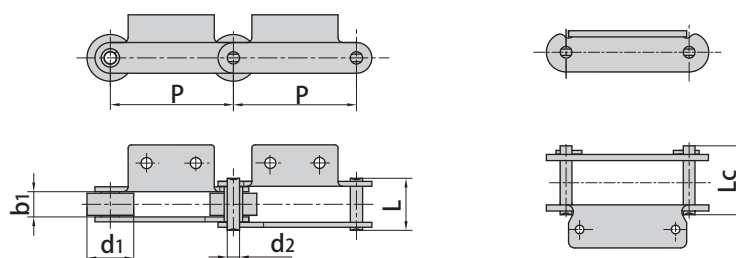

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P125F28A2	125.0	32.00	18.50	8.00	-	40.0	50.0/11240	55.0	3.13
P125F30A2-F	125.0	50.00	30.00	14.50	58.1	63.0	80.0/17984	88.0	8.76
P130K2F2	130.0	80.00	40.00	24.00	77.6	88.3	200.0/44992	218.0	13.90
P150F2	150.0	40.00	27.00	11.10	57.0	61.0	124.6/28318	137.0	5.40
P150F4	150.0	50.00	37.00	16.00	77.5	82.5	170.0/38243	187.0	10.90
P150F6	150.0	50.00	30.00	12.00	49.5	-	86.7/19704	95.0	7.27
P150F11A2	150.0	46.70	21.50	15.00	46.6	51.5	130.0/29245	142.0	7.13
P150F13A2	150.0	47.60	21.50	15.00	50.6	55.5	130.0/29245	142.0	8.52
P150F14A2	150.0	47.60	21.50	19.00	50.6	56.5	130.0/29245	142.0	8.59
P150F16A2	150.0	45.00	30.00	16.00	-	75.5	170.0/38243	187.0	8.56
P150F18	150.0	50.00	37.00	16.00	77.5	82.5	170.0/38243	187.0	14.49
RF10150RA2	150.0	50.80	30.00	14.50	69.0	-	113.0/25420	124.0	9.20
P150F21A2	150.0	57.48	35.91	19.05	-	79.0	150.0/33744	166.5	11.18
P150F26A2	150.0	44.50	30.00	14.50	-	69.0	113.0/25420	126.0	7.96
P150F31A2	150.0	50.00	27.00	12.00	-	70.0	150.0/33721	166.0	8.50
P150F32A2	150.0	44.50	27.00	11.30	-	67.0	78.0/17547	86.5	6.78
P150F78A1	150.0	50.00	30.90	14.50	-	70.0	150.0/33721	165.0	8.81
P150F85	150.0	70.00	36.00	19.00	-	94.1	160.0/35969	184.0	15.20
RF10150RA2-F	150.0	50.80	30.00	14.50	-	69.0	113.0/25420	124.0	9.50
P152F	152.4	40.10	37.50	19.10	97.5	-	328.7/74704	378.0	15.88
P152F4	152.4	50.80	30.60	14.27	62.8	67.5	88.0/20000	100.0	9.24
P152F11	152.4	38.00	53.50	14.70	112.4	-	130.0/29245	142.0	12.60
P152F16	152.4	70.00	76.20	25.40	152.0	-	160.0/35969	176.0	41.50
P152F19	152.4	50.80	30.60	14.27	62.8	67.5	112.0/25195	123.2	9.24
P152F20	152.4	47.60	39.70	19.05	99.7	-	300.0/67487	330.0	18.33
P152F32K2	152.4	36.00	45.00	20.00	103.0	-	300.0/67487	330.0	14.93
P152F33	152.4	36.00	68.00	20.00	128.0	-	300.0/67487	330.0	16.50
P152F41A2	152.4	36.00	36.00	15.50	-	90.0	235.2/52875	258.0	10.90
P152F42K2F1	152.4	63.50	34.90	19.00	93.0	-	152.0/34193	168.9	18.80
P152F43	152.4	76.20	35.00	23.81	108.0	-	446.8/100510	513.5	27.60
P152F50	152.4	101.60	44.00	22.20	87.0	-	250.0/56240	275.0	26.70
P152F54	152.4	30.00	53.00	16.00	112.0	-	175.0/39380	193.0	11.10
P152F56	152.4	50.80	33.34	15.88	86.0	-	113.0/25420	124.3	10.70
RF6205MF6A2	152.4	65.00	37.10	15.90	88.0	-	158.0/35543	186.0	16.80


Conveyor chains with attachments

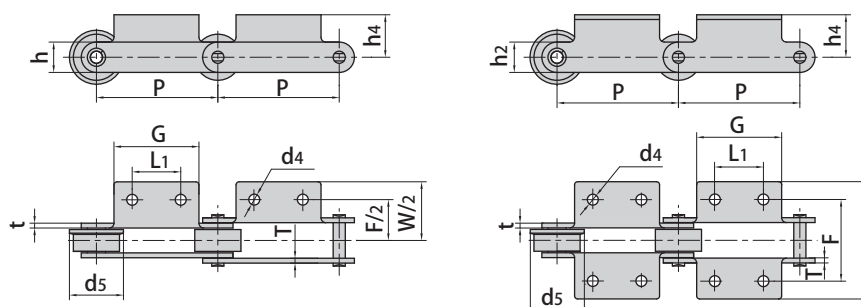

Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P125F28A2	125.0	46.0	76.0	64.00	90.00	45.00	22.00	8.00	3.00	42.0
P125F30A2-F	125.0	50.0	80.0	96.00	135.00	35.00	35.00	11.00	5.00	64.0
P130K2F2	130.0	55.0	95.0	102.00	144.00	47.50	60.00	11.00	6.00	-
P150F2	150.0	60.0	85.0	92.00	117.30	22.50	32.00	10.00	6.00	-
P150F4	150.0	60.0	85.0	120.00	150.00	33.00	43.00	14.00	8.00	-
P150F6	150.0	50.0	75.0	86.60	126.60	17.50	35.00	9×26	4.00	59.0
P150F11A2	150.0	36.0	60.0	163.50	189.60	40.15	39.70	10.60	5.00	-
P150F13A2	150.0	36.0	60.0	164.00	193.50	52.00	40.00	11.00	6.00	-
P150F14A2	150.0	36.0	60.0	164.00	193.50	52.00	40.00	11.00	6.00	-
P150F16A2	150.0	60.0	90.0	110.00	140.00	32.00	38.00	12.00	8.00	-
P150F18	150.0	60.0	85.0	120.00	150.00	33.00	43.00	M10	8.00	-
RF10150RA2	150.0	60.0	90.0	100.00	130.00	28.00	38.10	12.00	6.30	-
P150F21A2	150.0	26.0	45.7	100.40	129.40	58.50	44.45	10.90	6.40	-
P150F26A2	150.0	60.0	84.5	100.00	130.00	23.60	33.60	12.00	6.30	60.0
P150F31A2	150.0	60.0	90.0	100.00	139.00	28.00	35.00	11.00	6.00	66.0
P150F32A2	150.0	60.0	90.0	100.00	128.00	28.00	28.60	12.00	6.30	55.0
P150F78A1	150.0	△	90.0	100.00	136.60	28.95	38.10	11.50	6.30	65.0
P150F85	150.0	60.0	100.0	130.00	160.00	32.50	50.00	13.00	10.00	-
RF10150RA2-F	150.0	60.0	90.0	100.00	130.00	28.00	38.10	12.00	6.30	65.0
P152F	152.4	60.0	100.0	130.00	202.00	45.00	50.00	15.00	9.00	-
P152F4	152.4	60.0	100.0	110.00	140.00	32.00	38.00	15.00	6.00	65.0
P152F11	152.4	44.6	74.8	133.70	168.00	24.00	39.00	10.80	9.60/11.40	-
P152F16	152.4	63.5	178.5	184.15	241.15	47.65	63.50	20.70	12.70	-
P152F19	152.4	60.0	100.0	110.00	140.00	32.00	38.00	15.00	6.00	65.0
P152F20	152.4	△	76.2	120.65	172.30	41.30	50.80	17.50	9.50	-
P152F32K2	152.4	60.0	110.0	135.00	171.00	40.00	52.00	14.00	10.00	-
P152F33	152.4	60.0	110.0	158.00	194.00	40.00	52.00	14.00	10.00	-
P152F41A2	152.4	60.0	90.0	120.00	160.00	35.50	50.00	14.00	8.00	-
P152F42K2F1	152.4	66.8	140.0	108.20	148.20	41.40	50.80	12.70	9.50	-
P152F43	152.4	76.2	108.0	111.10	155.60	44.45	60.30	12.70	11.10	-
P152F50	152.4	63.5	102.0	101.60	135.00	37.50	65.00	13.50	6.00	-
P152F54	152.4	45.0	74.0	135.00	165.00	25.40	39.00	11.00	10.00	-
P152F56	152.4	50.8	76.2	101.60	133.40	28.60	38.10	11.10	8.00	-
RF6205MF6A2	152.4	60.0	100.0	120.00	158.00	38.00	45.00	15.00	8.00	85.0

△Attachments with 1 hole


Conveyor chains with attachments

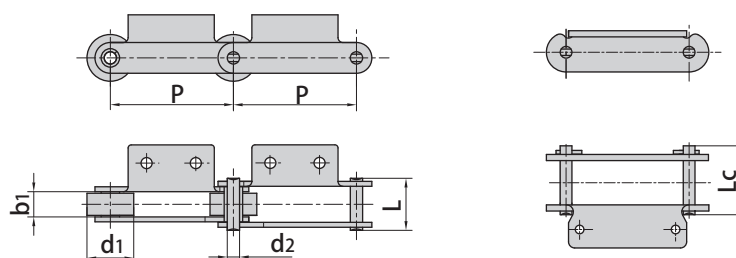

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P152F78K2F1	152.4	69.85	37.60	22.23	-	97.1	400.0/89923	440.0	26.70
P152F107A2	152.4	50.80	27.60	11.10	-	70.0	110.0/24728	121.0	9.10
P152F111K2	152.4	69.85	37.10	22.23	-	111.2	413.0/92846	474.0	25.10
P152F117K2	152.4	36.00	36.00	15.50	-	90.0	232.0/52155	255.0	12.30
*P152F128K2	152.4	44.45	76.20	25.40	142.50	153.0	365.0/82055	401.0	36.03
P152F137A2	152.4	50.80	28.70	12.00	-	74.0	120.0/26977	132.0	8.52
RF6205MF7	152.4	65.00	37.10	15.90	-	88.0	158.0/35519	186.0	15.49
P153F3K2	153.6	35.00	54.10	17.50	-	106.0	200.0/44961	220.0	14.02
*P160F1	160.0	36.00	55.00	20.00	108.00	-	50.0/11364	55.0	14.50
P160F3	160.0	48.00	25.00	14.85	62.50	-	120.0/26977	132.0	7.10
P160F5	160.0	60.00	33.00	14.27	64.00	72.0	150.0/34091	165.0	8.00
P160F8	160.0	40.00	20.00	11.00	50.00	-	55.0/12500	61.0	4.58
P160F18	160.0	50.00	34.00	20.00	-	88.0	100.0/22496	109.5	14.93
P160F25	160.0	70.00	25.00	14.25	55.50	60.5	100.0/22496	109.5	7.65
P160F26	160.0	50.00	29.90	13.94	-	60.0	105.0/23620	115.5	6.41
*P160F37A2	160.0	45.00	56.00	28.00	-	150.0	600.0/134885	660.0	31.24
P185	185.0	50.80	30.60	14.27	62.80	67.5	70.0/15909	77.0	8.42
P200F6	200.0	50.00	37.00	16.00	77.50	82.5	170.0/38243	188.7	9.69
P200F7	200.0	40.00	27.00	11.10	57.00	61.0	124.6/28030	137.0	9.78
P200F8	200.0	65.00	37.00	16.00	86.50	-	170.0/38243	188.7	15.23
P200F13	200.0	80.00	51.00	20.00	106.00	-	180.0/40492	198.0	26.10
P200F15	200.0	40.10	51.40	19.10	109.50	-	213.0/47916	234.3	12.60
P200F23	200.0	65.00	36.50	16.00	-	86.5	170.0/38243	188.7	11.57
P200F22	200.0	90.00	48.00	16.00	-	99.0	170.0/38243	188.7	19.60
P200F26A2	200.0	50.00	37.00	16.00	85.50	90.5	170.0/38243	188.7	11.08
P200F28K2F1	200.0	65.00	37.10	16.00	77.50	85.5	160.0/35969	176.0	18.80
P200F30	200.0	65.00	38.00	18.00	-	79.5	120.0/26977	130.8	10.80
RF12200A2-F-200	200.0	65.00	37.10	15.90	-	86.5	279.0/62763	306.9	14.20
P200F82A2-F	200.0	65.00	51.00	16.00	-	100.0	170.0/38243	195.0	14.60
P203.2F6	203.2	88.90	45.97	25.40	-	116.3	489.0/110005	528.1	37.00
P203.2F10	203.2	88.90	45.97	25.40	-	116.3	488.0/109706	536.0	37.00
RF10250RA2	250.0	50.80	30.00	14.50	69.00	-	113.0/25420	124.3	6.47
P250F25	250.0	50.00	30.00	14.00	-	81.3	170.0/38243	188.7	8.40
*P250F38K2	250.0	50.80	65.00	38.00	-	143.5	700.0/157366	770.0	39.10
P250F68A2	250.0	50.00	30.60	14.00	-	70.6	112.0/25178	128.0	7.60

*Bush chain: d1 in the table indicates the external diameter of the bush.

Conveyor chains with attachments

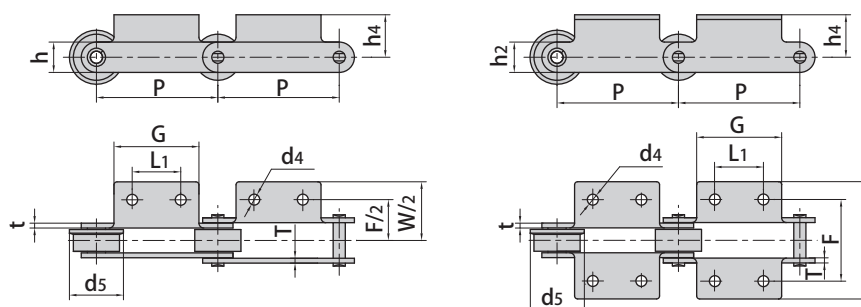


Donghua Chain No.	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P152F78K2F1	152.4	76.20	114.3	111.00	165.00	41.30	57.20	13.0	9.52	-
P152F107A2	152.4	50.80	88.9	101.60	132.80	31.75	38.10	M12	6.35	-
P152F111K2	152.4	76.20	114.3	111.10	153.90	41.30	57.20	13.5	12.70	-
P152F117K2	152.4	60.00	100.0	120.00	160.00	38.00	50.00	14.0	8.00	-
*P152F128K2	152.4	63.50	175.5	184.00	238.20	47.75	63.50	17.5	12.70	-
P152F137A2	152.4	50.80	76.2	102.40	137.00	32.00	32.00	10.5	7.00	-
RF6205MF7	152.4	60.00	100.0	120.00	158.00	34.50	45.00	14.8	8.00	85.0
P153F3K2	153.6	44.50	204.8	136.60	168.60	38.10	44.50	12.7	8.00	-
*P160F1	160.0	60.00	110.0	130.00	173.00	40.00	50.00	14.00	9.00	-
P160F3	160.0	49.00	70.0	83.00	117.00	32.50	35.00	8.5	6.00	-
P160F5	160.0	35.00	70.0	110.00	166.00	38.70	40.00	14.0	5.60	-
P160F8	160.0	80.50	133.0	56.00	100.00	16.00	32.00	8.33x13.30	4.50	-
P160F18	160.0	60.00	110.0	110.00	153.00	40.00	50.00	15.0	9.00	-
P160F25	160.0	△	120.0	70.00	89.00	27.50	36.00	10.0	5.60	-
P160F26	160.0	30.00	50.0	94.00	124.00	35.00	40.00	10.0	4.00	65.0
*P160F37A2	160.0	100.00	145.0	160.0	210.00	62.00	80.00	18.0	12.00	-
P185	185.0	60.00	120.0	110.00	140.00	32.00	38.00	15.0	6.00	65.0
P200F6	200.0	81.50	120.0	120.00	150.00	33.00	43.00	14.0	8.00	-
P200F7	200.0	81.50	120.0	92.00	122.00	22.00	32.00	10.0	6.00	-
P200F8	200.0	80.00	120.0	200.00	238.00	38.00	43.00	15.0	8.00	80.0
P200F13	200.0	110.00	150.0	152.00	204.00	43.00	50.00	13.0	9.00	-
P200F15	200.0	80.00	120.0	150.00	200.00	43.00	50.80	15.0	9.50	-
P200F23	200.0	80.00	120.0	120.00	170.00	38.00	43.00	15.0	8.00	-
P200F22	200.0	80.00	120.0	212.00	250.00	38.00	43.00	15.0	8.00	100.0
P200F26A2	200.0	81.50	120.0	120.00	154.00	33.00	43.00	14.0	10.00	-
P200F28K2F1	200.0	80.00	120.0	120.0	158.00	75.00	44.50	12.0	8.00	-
P200F30	200.0	65.00	100.0	119.00	159.00	30.00	50.00	12.5/18.5	6.00	-
RF12200A2-F-200	200.0	80.00	120.0	120.00	158.00	38.00	44.50	15.0	7.90	80.0
P200F82A2-F	200.0	60.00	100.0	116.00	146.00	42.00	43.00	15.0	8.00	80.0
P203.2F6	203.2	114.30	152.4	131.83	192.00	54.10	69.80	17.5	12.70	-
P203.2F10	250.0	82.55	152.4	131.83	192.00	54.10	69.80	17.5	12.70	-
RF10250RA2	250.0	80.00	120.0	100.00	130.00	28.00	38.10	12.0	6.30	-
P250F25	250.0	60.00	93.0	108.00	143.60	30.00	38.00	10.0	8.00	-
*P250F38K2	250.0	75.00	120.0	192.00	232.00	68.00	100.00	18.5	12.00	-
P250F68A2	250.0	125.00	160.0	100.00	132.00	28.00	38.00	12.0	6.00	65.0

△Attachments with 1 hole

*Bush chain: d1 in the table indicate the external diameter of the bush.


Conveyor chains with attachments

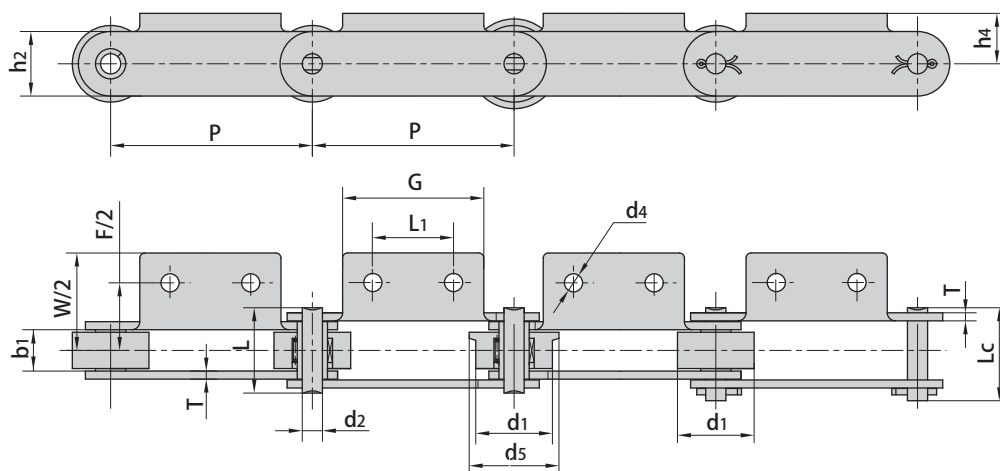

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
M56F4-P-100	100.0	38.0	20.5	10.00	42.3	46.1	56.0/12727	62.0	4.30
M56F7-P-100	100.0	38.0	17.0	10.00	38.8	42.6	56.0/12727	62.0	4.84
M56F9-P-100	100.0	38.0	20.5	10.00	46.3	50.1	88.2/20045	97.0	5.60
P100	100.0	50.0	29.9	13.94	60.0	-	160.0/36364	176.0	9.27
P100F4A2-F1	100.0	40.0	22.0	11.30	-	53.5	65.0/14612	71.5	5.52
P150F41	150.0	38.0	20.5	12.00	51.2	55.5	100.0/22480	110.0	5.50
P150F40	150.0	38.0	20.5	10.00	41.1	44.6	80.0/17984	88.0	3.70
P160	160.0	50.0	29.9	13.94	60.0	-	160.0/36364	176.0	7.23
P200F28	200.0	65.0	37.1	16.00	77.5	85.5	160.0/36364	176.0	14.10
P200F31	200.0	80.0	37.1	16.00	77.5	85.5	160.0/36364	176.0	18.10
P300	300.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	24.32
P350	350.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	23.60
P400F1	400.0	80.0	45.0	23.81	95.5	103.0	300.0/68181	320.0	22.67


Donghua Chain No.	L1	G	F	W	h4	h2	d4	T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm
M56F4-P-100	40.0	70.0	68.5	98.50	25.0	25.0	9.0	4.0	44.5
M56F7-P-100	40.0	70.0	71.5	92.00	55.0	25.0	6.5	4.0	45.0
M56F9-P-100	40.0	70.0	67.5	96.58	25.0	32.0	9.0	5.0	44.5
P100	40.0	65.0	98.0	128.00	35.0	40.0	10.0	4.0	65.0
P100F4A2-F1	40.0	65.0	70.0	94.00	22.0	32.0	10.0	4.5	50.0
P150F41	60.0	90.0	71.0	94.00	29.0	32.0	10.0	6.0	-
P150F40	60.0	90.0	71.0	94.00	27.0	32.0	10.0	3.7	-
P160	85.0	115.0	94.0	124.00	35.0	40.0	10.0	4.0	65.0
P200F28	80.0	120.0	120.0	158.00	63.0	44.5	12.0	8.0	80.0
P200F31	80.0	140.0	120.0	158.00	85.0	44.5	M10	8.0	100.0
P300	200.0	250.0	150.0	190.00	105.0	60.0	13.0	10.0	100.0
P350	250.0	300.0	150.0	190.00	105.0	60.0	13.0	10.0	100.0
P400F1	300.0	350.0	150.0	190.00	105.0	60.0	15.0	10.0	100.0

Conveyor chains with attachments

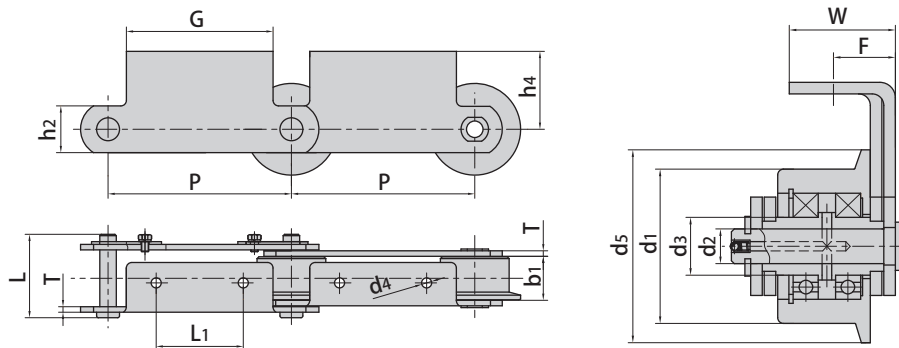

Donghua Chain No.	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length	Bush diameter	Plate depth	Plate thickness	Ultimate tensile strength
	P	d1 max	d5	b1 min	d2 max	L max	d3 max	h2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
M160F6-F-200	200.0	80.0	98.0	47.5	18.0	91.0	30.0	51.0	6.0	160.0/35993
M160F7-F-200	200.0	80.0	98.0	47.5	18.0	99.0	30.0	51.0	8.0	160.0/35993
M224F9-F-200	200.0	90.0	105.0	44.5	26.0	112.0	35.0	60.0	8.0	224.0/50390


Donghua Chain No.	P	L1	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
M160F6-F-200	200.0	95.0	160.0	32.0	55.0	85.0	11.0
M160F7-F-200	200.0	95.0	160.0	36.0	59.0	85.0	11.0
M224F9-F-200	200.0	120.0	160.0	35.0	50.0	85.0	12.0

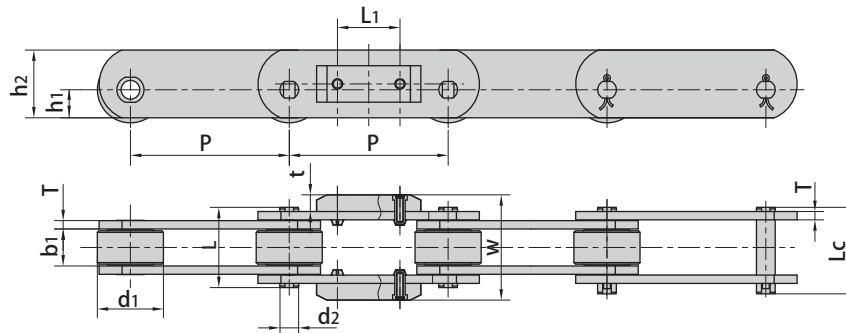

Donghua Chain No.	P	L1	W	t
	mm	mm	mm	mm
P152F13	152.4	60.0	101.0	16.0


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate depth		Plate thickness	Ultimate tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h1 max	h2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P152F13	152.4	63.4	35.0	18.0	77.0	83.0	26.9	65.0	8.0	160.0/36364

Conveyor chains with attachments

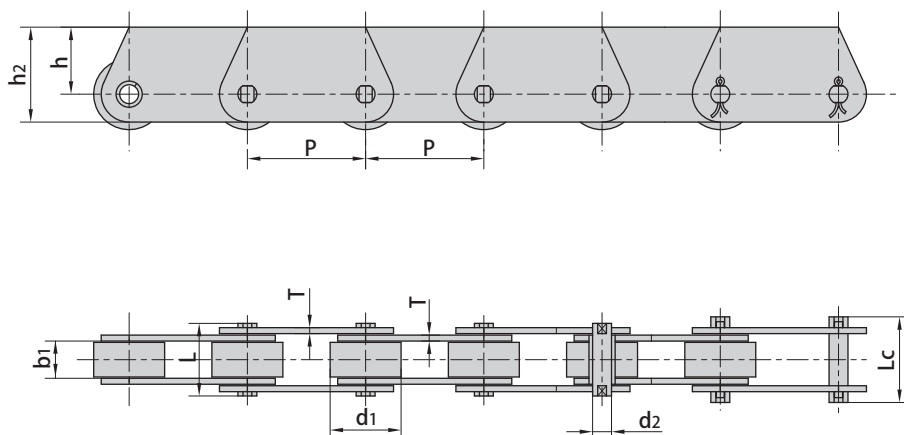


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate depth		Plate thickness	Ultimate tensile strength	Weight per meter
	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h max	h ₂ max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P31.75F1	31.75	19.05	9.80	5.08	19.2	22.5	18.0	25.5	1.60	20.0/4545	1.48
P63F10	63.00	42.00	23.00	11.11	50.0	53.0	29.4	44.4	4.80	80.0/17997	8.32
P100F59	100.00	40.00	25.00	14.50	61.0	67.5	23.0	40.0	6.30	100.0/22496	7.98
P101.6F10	101.60	50.00	30.00	14.27	64.0	68.5	30.0	50.0	6.40	180.0/40909	11.56
P152F49	152.40	63.50	34.00	15.60	-	82.0	38.1	65.0	8.00	160.0/35993	16.30
P160F2	160.00	60.00	38.00	20.00	-	80.0	36.0	60.0	6.00	190.0/43181	12.57
P160F44	160.00	60.00	38.00	20.00	72.0	78.0	35.0	60.0	6.00	190.0/42700	12.30
P300F23	300.00	65.00	37.10	15.90	-	90.0	40.0	63.5	9.50	213.0/47884	13.60
MT18F1-S-50	50.00	18.00	11.50	5.72	25.5	28.2	10.0	17.5	2.50	18.0/4050	1.36
MT18F3-P-50	50.00	25.00	11.50	5.72	24.0	26.4	16.5	25.0	2.03	18.0/4050	2.00
MT40F-P-50	50.00	31.00	15.00	10.00	36.0	39.0	17.5	30.0	4.00	40.0/9000	4.33
MT28F1-P-63	63.00	30.00	18.00	7.00	34.0	37.5	20.0	30.0	3.00	28.0/6300	3.40
MT40F1-P-63	63.00	30.00	16.00	8.50	37.0	40.0	19.0	30.0	4.00	40.0/9000	3.90
MT80F2-P-63	63.00	30.00	25.00	7.00	45.2	48.7	20.0	30.0	4.00	35.0/7875	4.58
MT40F3-P-80	80.00	36.00	20.00	8.50	42.5	46.5	22.5	35.0	4.00	40.0/9000	4.81
MT40F-P-100	100.00	31.00	15.00	10.00	36.0	39.0	17.5	30.0	4.00	40.0/8992	3.14
MT80F4-P-100	100.00	50.00	28.00	14.35	55.0	59.5	32.5	57.5	5.00	120.0/26977	9.38
MT56F1-B-100	100.00	15.00	24.00	10.00	46.0	49.5	35.0	50.0	4.00	56.0/12600	3.38
MT80F2-P-100	100.00	50.00	28.00	14.35	55.0	59.5	32.5	51.5	5.00	120.0/26995	9.56
MT315F3-P-250	250.00	85.00	57.20	24.00	119.7	119.7	53.0	84.8	9.50	315.0/70815	19.85

Conveyor chains with attachments

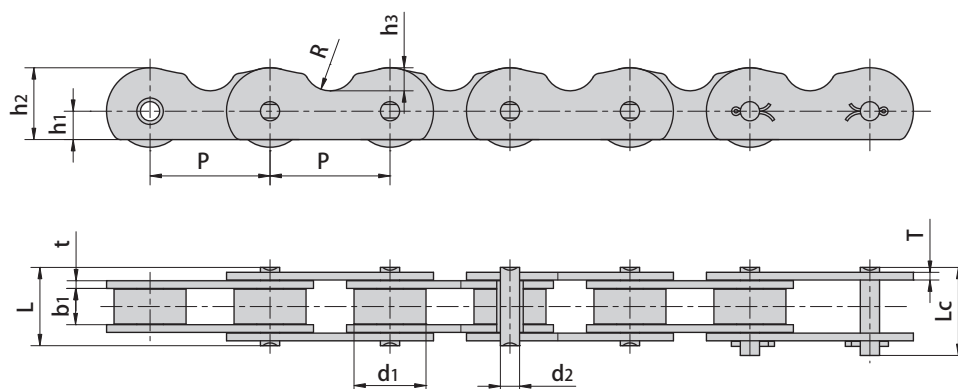


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Attachment dimension			Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	h1	h3	R	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P31.75F11	31.75	19.05	9.4	5.08	20.7	23.3	19.0	2.0	7.5	6.1	7.0	21.8/4900	25.0	1.55

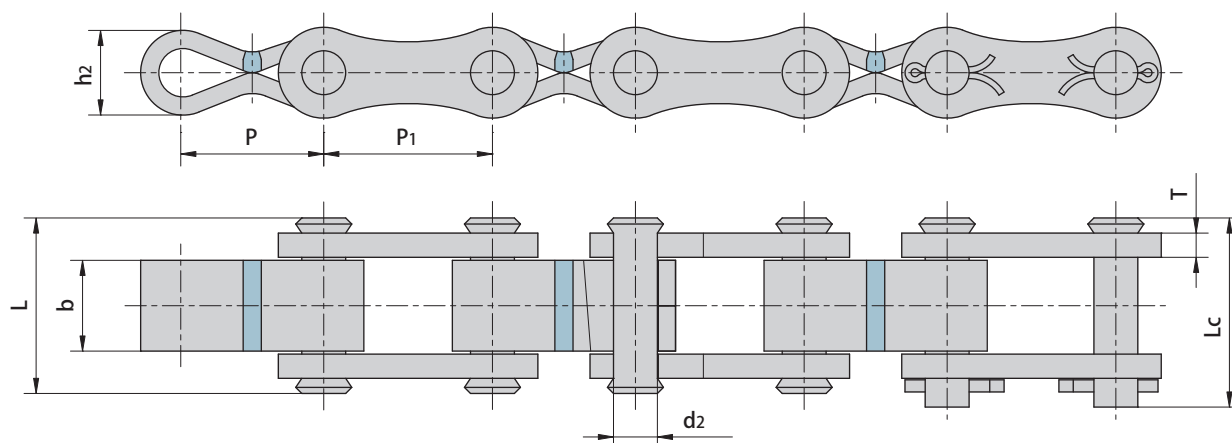


Donghua Chain No.	Pitch		Pin diameter	Pin length		Plate depth	Plate thickness	Attachment dimension	Ultimate tensile strength
	P	P1	d2 max	L max	Lc max	h2	T max	b	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P47.25/55.75	47.25	55.75	14.5	59.0	62.5	28.0	8.0	30.0	130.0/28225

Conveyor chains with attachments

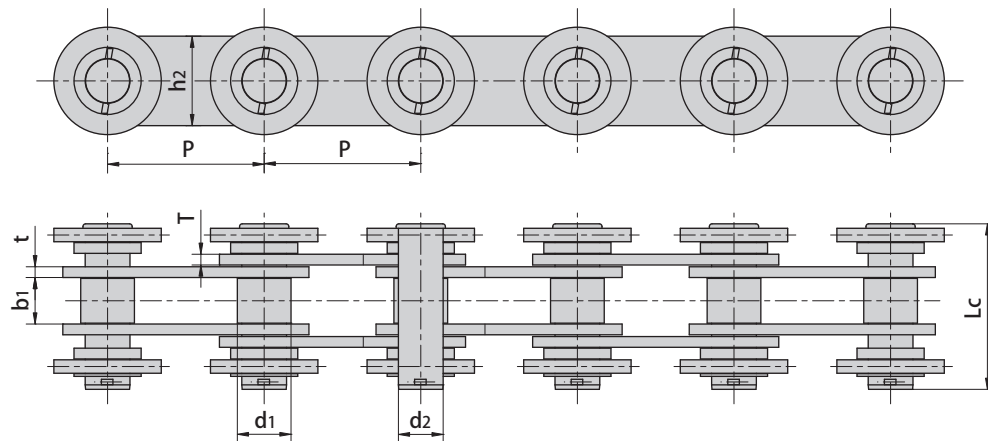


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P175F1	175.0	60.0	52.0	50.0	176.0	100.0	12.0	366.0/82280	400.0	25.5

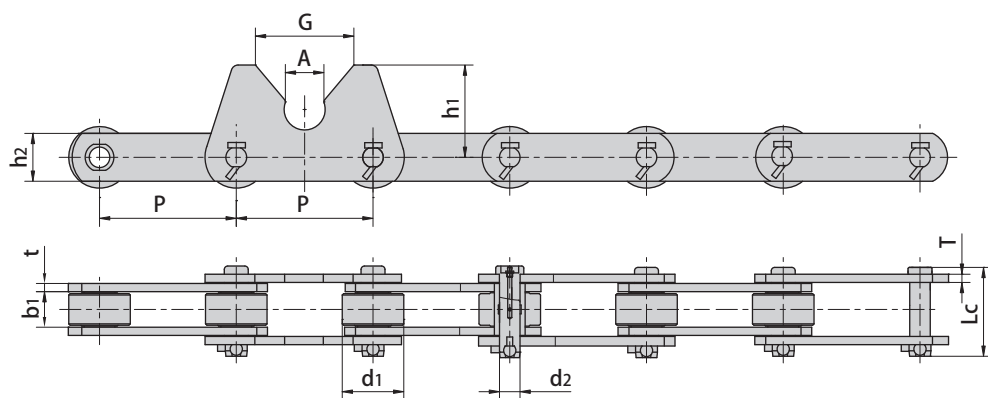

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P200F60	200.0	90.0	52.0	30.0	132.0	70.0	12.0	530.0/119148	609.0	36.9


Donghua Chain No.	G	A	h1
	mm	mm	mm
P200F60	144.0	56.6	135.0

Conveyor chains with attachments

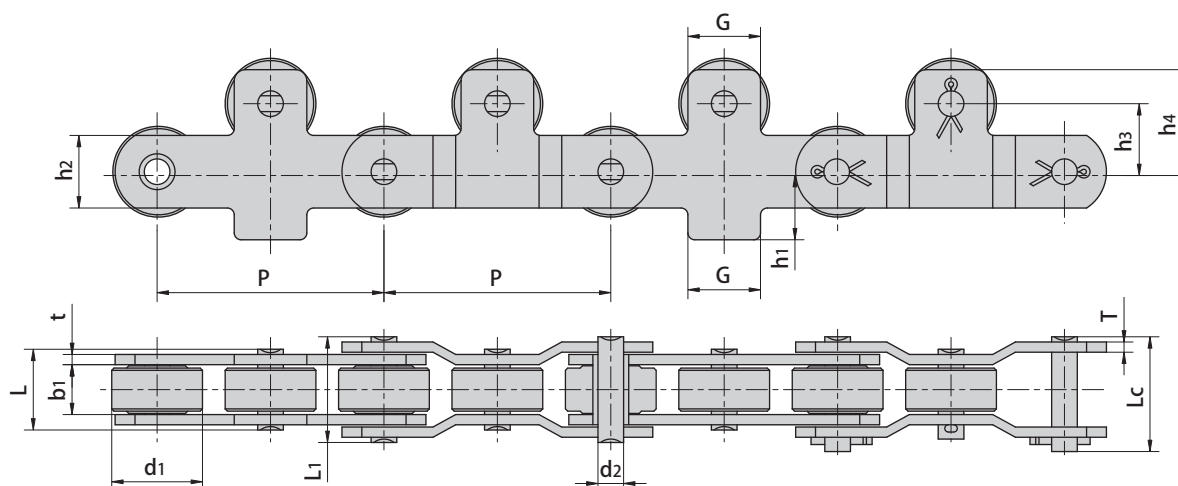


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length			Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	L1 max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P100F126	100.0	40.0	22.0	11.3	36.5	47.0	51.0	32.0	4.5	70.0/15736	80.0	7.7

Donghua Chain No.	G	h1	h3	h4
	mm	mm	mm	mm
P100F126	32.0	30.0	30.0	45.0

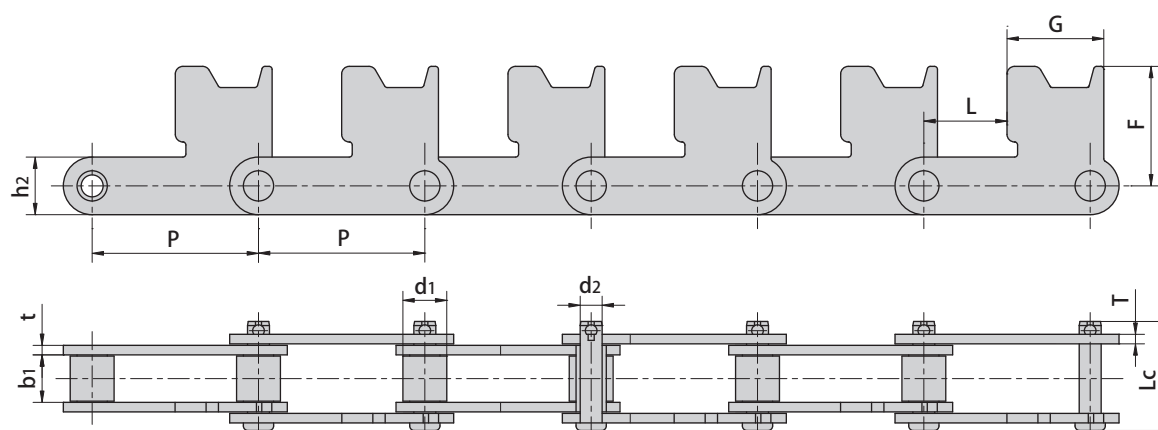

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Attachment dimension			Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	F	G	L	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P110F5	110.0	29.0	30.4	14.5	72.1	38.1	6.3	79.05	64.0	55.0	229.0/51484	250.0	8.3

Conveyor chains with attachments

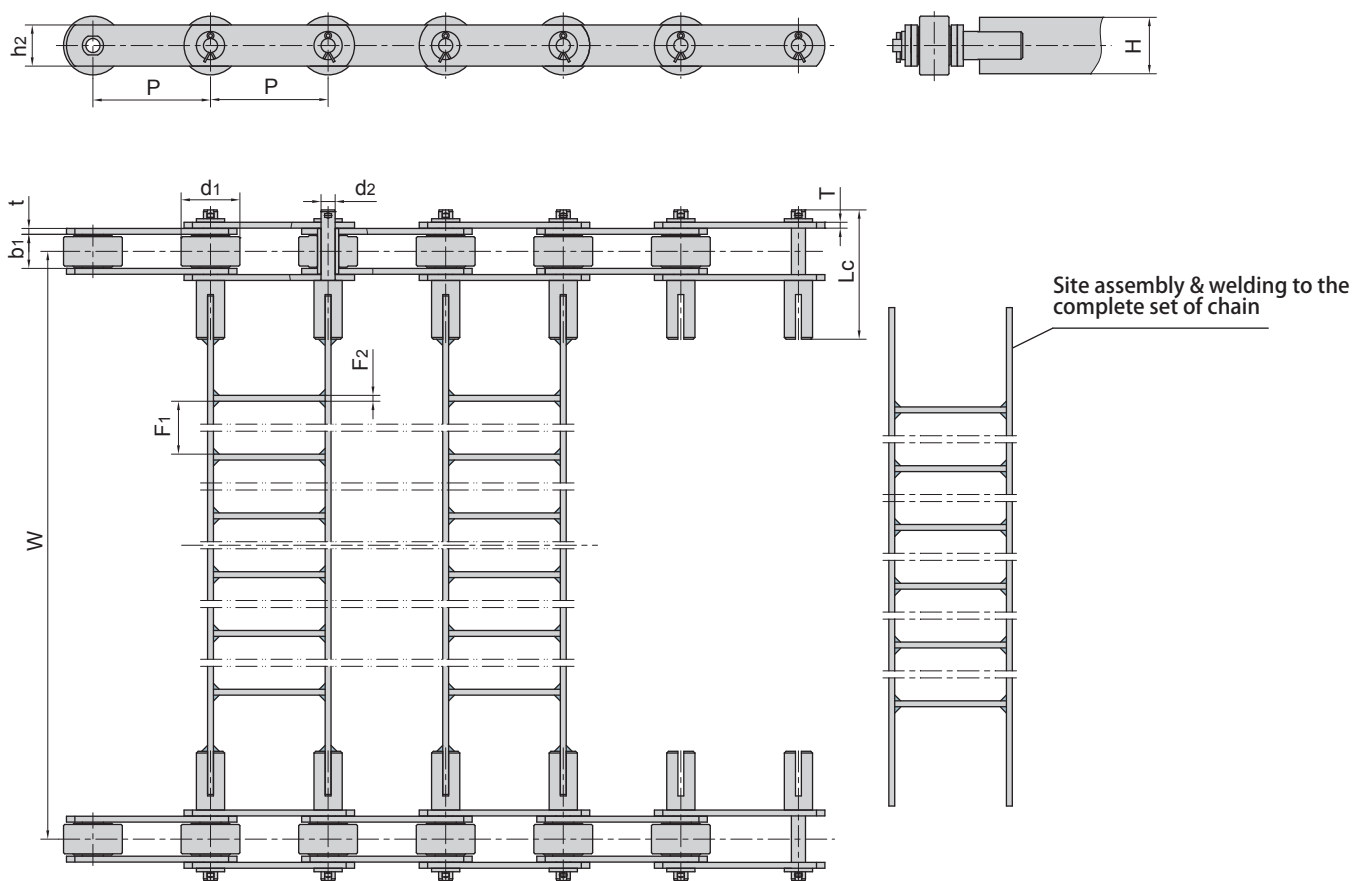


Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P100F145	100.0	50.0	28.0	11.9	110.0	35.0	5.0	80.0/17984	88.0	38.4

Donghua Chain No.	W	F1	F2	H
	mm	mm	mm	mm
P100F145	900.0	125.0	5.0	48.0

Conveyor chains with attachments


P315 conveyor chain

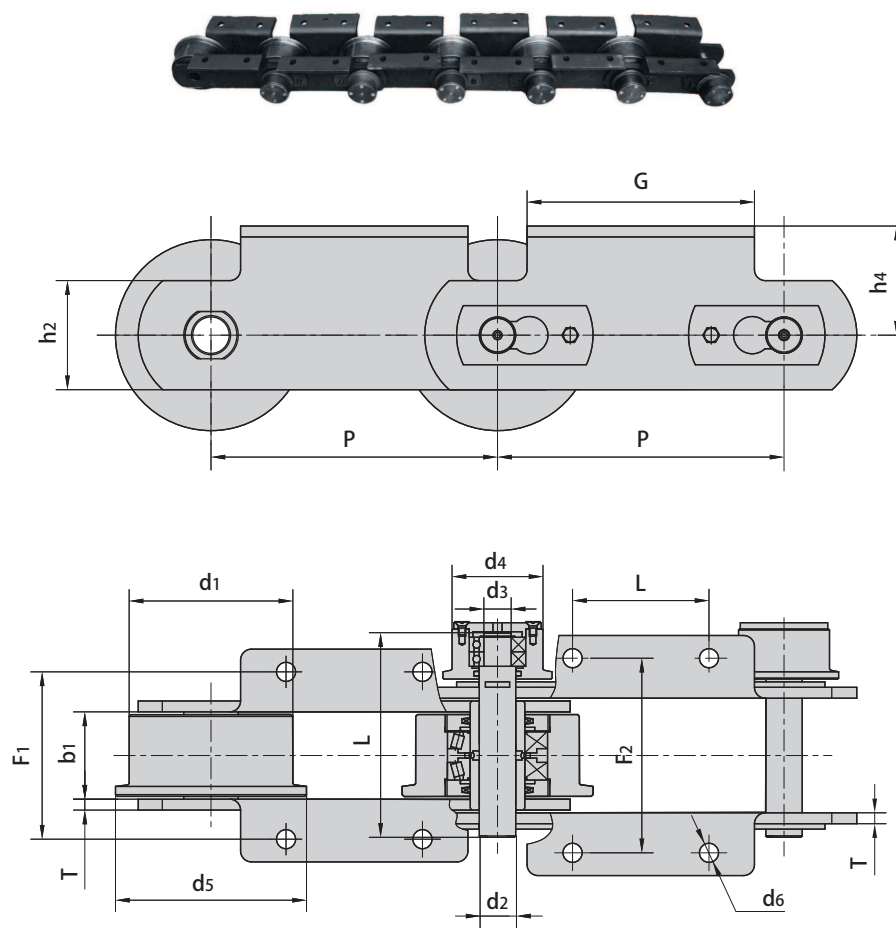

Donghua Chain No.	P	L	G	F ₁	F ₂	h ₄	h ₂	d ₆	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm
P315	315	150.0	250.0	180.0	206.0	120.0	120.0	21.0	12.0


Donghua Chain No.	Pitch	Roller diameter			Width between inner plates	Pin diameter		Pin length	Ultimate tensile strength	Average tensile strength
	P	d ₁ max	d ₄ max	d ₅ max	b ₁ min	d ₂ max	d ₃ max	L ₁ max	Q _{min}	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
P315	315	180.0	100.0	210.0	90.0	40.0	30.0	217.0	100.0/22727	110.0

Conveyor chains with attachments

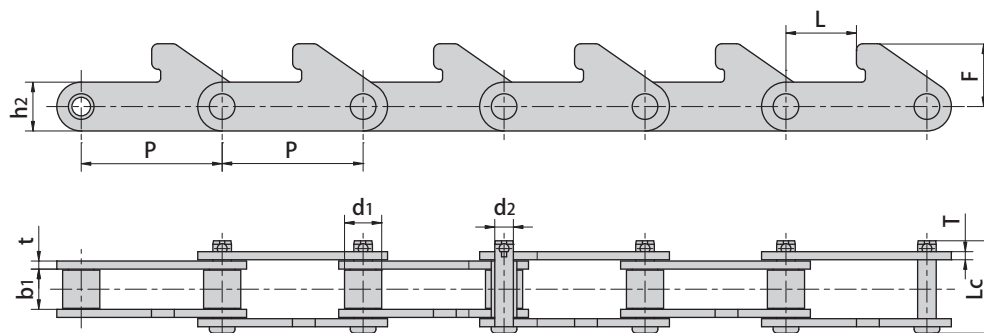

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Attachment dimension		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	F	L	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P110F6	110.0	29.0	30.4	14.5	72.1	38.1	6.3	49.05	55.0	229.0/51484	250.0	7.0

Bottle washer conveyor chain

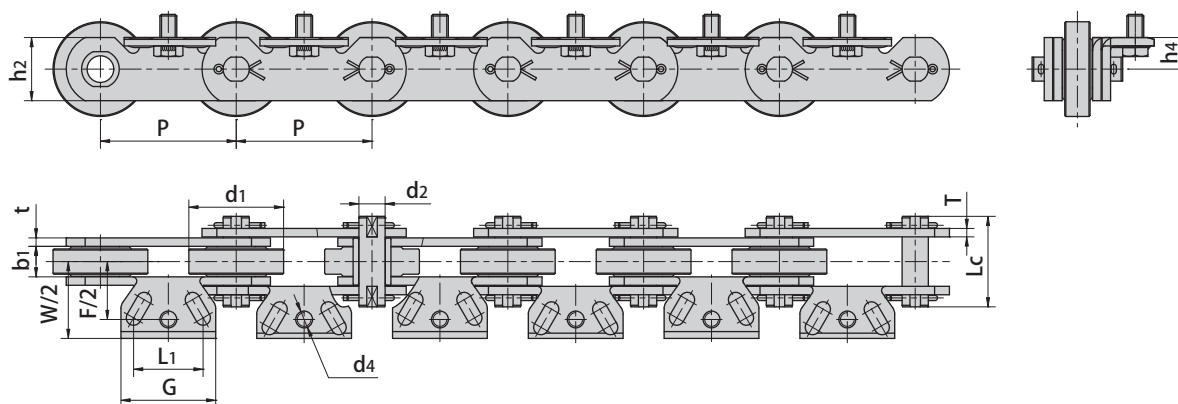

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P129A1F1-P	129.0	90.0	29.0	24.9	86.0	60.0	8.0	350.0/78683	385.0	22.6

Donghua Chain No.	L1	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm
P129A1F1-P	66.0	90.0	110.0	146.0	30.0	M16