


Double pitch conveyor chains with top rollers

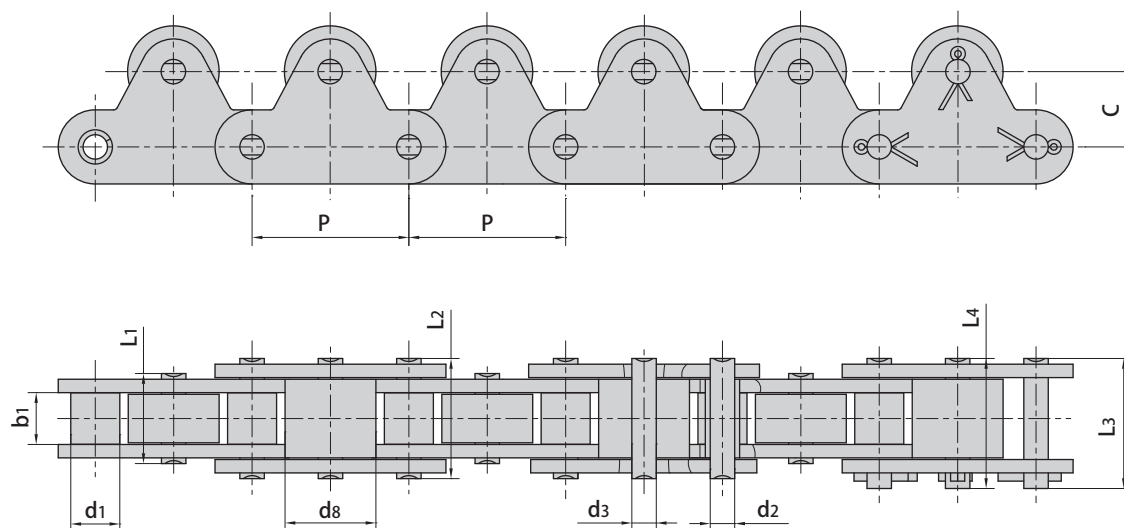

Donghua Chain No.	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length				Attachment dimension		Ultimate tensile strength	Weight per meter
	P mm	d1 max mm	d8 max mm	b1 min mm	d2 max mm	L1 max mm	L2 max mm	L3 max mm	L4 max mm	C mm	d3 mm	Q min kN/lbf	q kg/m
C2040-1LTR	25.40	7.95	15.88	7.85	3.96	13.5	16.6	17.8	18.8	12.7	3.96	14.1/3205	1.31
C2050-1LTR	31.75	10.16	19.05	9.40	5.08	16.5	20.7	22.2	23.3	15.9	5.08	22.2/5045	2.03
C2060-1LTR	38.10	11.91	22.23	15.57	5.94	21.0	25.9	27.7	28.3	18.3	5.94	31.8/7227	2.89
C2080-1LTR	50.80	15.88	28.58	15.75	7.92	26.2	32.7	35.0	36.5	29.0	11.5	56.7/12886	4.54
C2010-1LTR	63.50	19.05	39.67	18.90	9.53	32.3	40.4	44.7	44.7	35.4	14.5	88.5/20114	7.72
C2040-1LTRF2	25.40	7.95	15.88	7.85	3.96	13.5	16.6	17.8	18.8	15.0	3.96	14.1/3205	1.24
C2050-1LTRF3	31.75	10.16	19.05	9.40	5.08	16.5	20.7	22.2	23.3	19.0	5.08	22.2/5045	1.91
C2060-1LTRF6	38.10	11.91	22.23	15.57	5.94	21.0	25.9	27.7	28.3	23.0	5.94	31.8/7227	2.80
C2100-1LTRF2	63.50	19.05	39.67	18.90	9.53	32.3	40.4	44.7	44.7	31.8	9.53	88.5/20114	7.42