


Driving chains

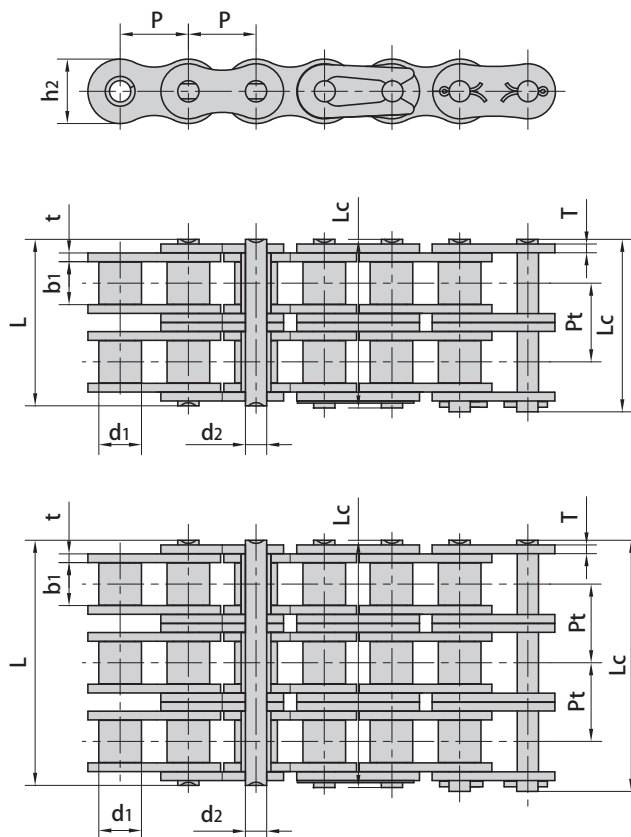

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	t/T max mm	Pt mm	Q min kN/lbf	Q0 kN	q kg/m
20A-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00/39791	219.4	7.80
20AFT-2	31.75	19.05	18.90	9.53	76.4	80.5	30.10	4.00	35.76	211.68/47587	262.5	8.09
20A-3	31.75	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/59686	309.6	11.77
20AFT-3	31.75	19.05	18.90	9.53	112.2	116.3	30.10	4.00	35.76	330/74186	395.0	12.10
24A-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00/57101	314.9	11.70
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.40	4.50/3.50	36.45	250/56202	290.0	10.82
24B-2	38.10	25.40	25.40	14.63	101.7	106.2	33.20	4.50/3.50	48.36	280.0/62946	319.2	13.40
100SLR-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	173.4/39399	190.0	7.89
16BSLR-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0/23829	133.0	5.42