



Universal movement conveyor chains

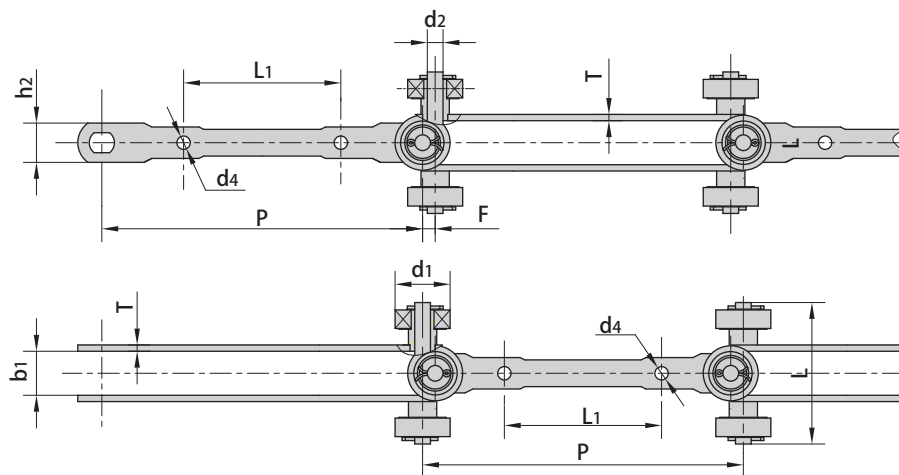


Donghua Chain No.	Pitch	Roller diameter	Width between outer plates	Pin diameter	Pin length	plate dimension		Attachment dimension			Ultimate tensile strength
	P	d1 max	b1 min	d2 max	L max	h2 max	T max	L1	d4	F	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P210	204.0	35.0	27.5	10.0	90.0	25.0	4.0	100.0	8.5	8.0	50.0/11364
SJ406S-50	203.2	35.0	27.5	10.0	90.0	25.0	4.0	100.0	8.5	11.0	50.0/11364

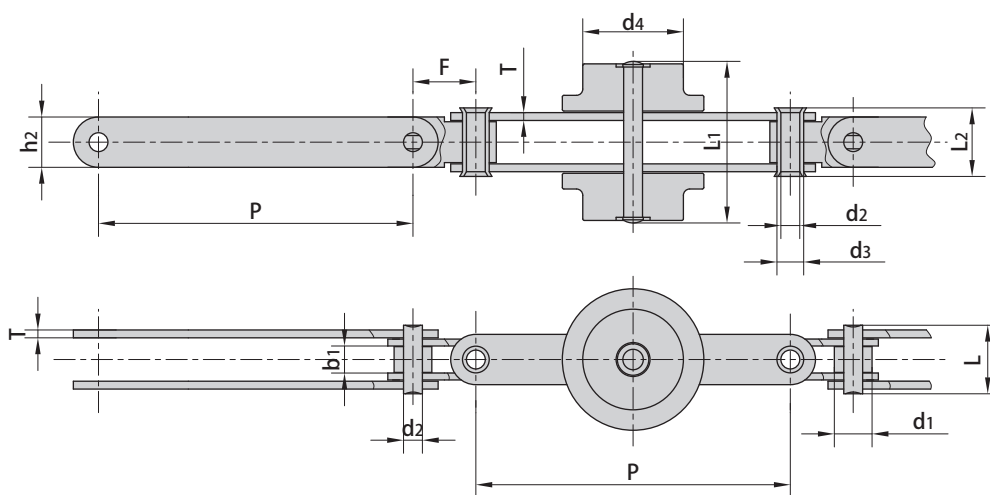


Donghua Chain No.	Pitch	Roller diameter		Width between inner plates	Pin diameter		Pin length			Plate dimension		Attachment dimension	Ultimate tensile strength
	P	d1 max	d4 max	b1 min	d2	d3	L max	L1 max	L2 max	h2 max	T max	F	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P100F11	100.0	12.0	32.0	8.6	6.0	8.5	22.0	53.0	22.0	16.0	2.5	20.0	20.0/4545

Universal movement conveyor chains

CONVEYOR CHAINS

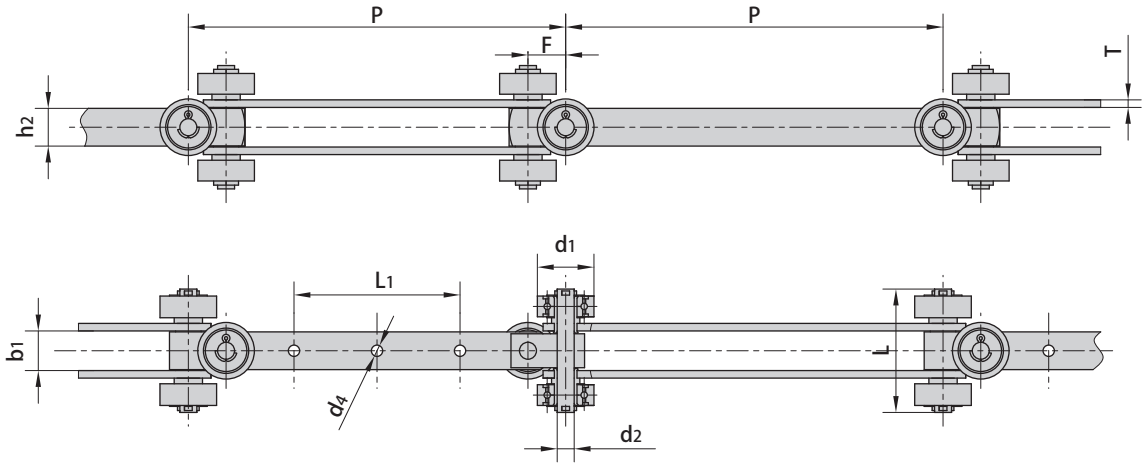


Donghua Chain No.	Pitch		Roller diameter		Width between outer plates		Pin diameter		Pin length		plate dimension		Attachment dimension			Ultimate tensile strength
	p	d1 max	b1 min	d2 max	L max	h2 max	T max	L1	d4	F	Q min					
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf					
SJ400-40	200.0	30.0	20.0	9.0	65.0	20.0	3.0	88.0	6.44	20.0	15.0/3374					
SJ400-60	200.0	35.0	21.0	10.0	64.5	20.0	4.0	88.0	6.50	20.0	60.0/13497					
SJ400-100	200.0	40.0	26.0	14.0	75.0	30.0	4.0	88.0	10.00	25.0	100.0/22495					
SJ405S-60	203.2	47.0	30.0	14.0	95.0	30.0	4.0	76.2	8.40	16.5	50.0/11247					
SJ400F3-120	200.0	45.0	31.0	14.0	102.0	30.0	6.0	85.0	10.5	20.0	100.0/22495					

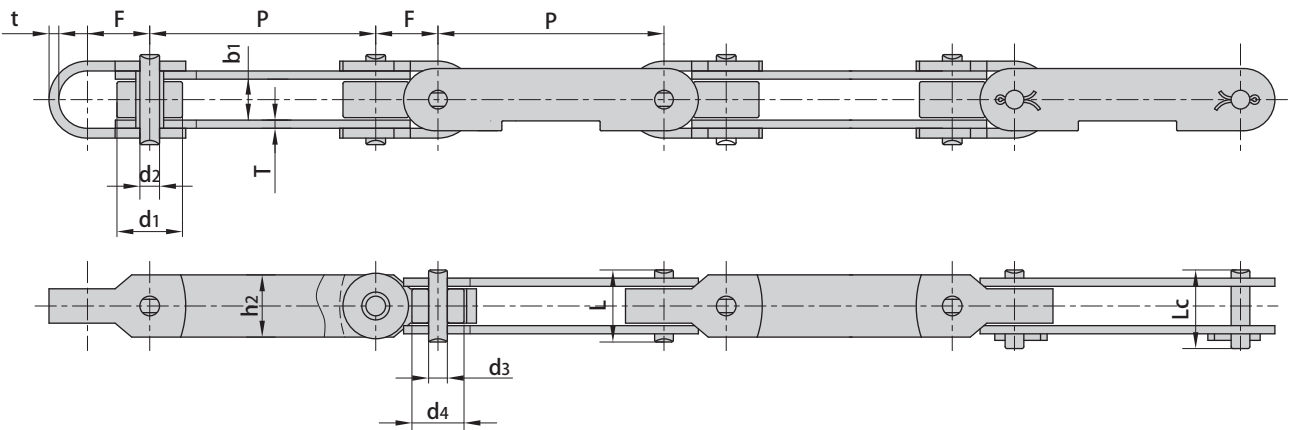

Donghua Chain No.	Pitch		Roller diameter		Width between inner plates		Pin diameter		Pin length		plate dimension		Attachment dimension		Ultimate tensile strength
	p	d1 max	d4 max	b1 min	d2	d3	L max	Lc max	h2 max	T max	F	t	Q min		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf		
P69F2	69.0	20.0	15.9	8.6	6.0	5.72	22.0	24.0	19.0	2.5	19.0	3.0	20.0/4545		

Universal movement conveyor chains

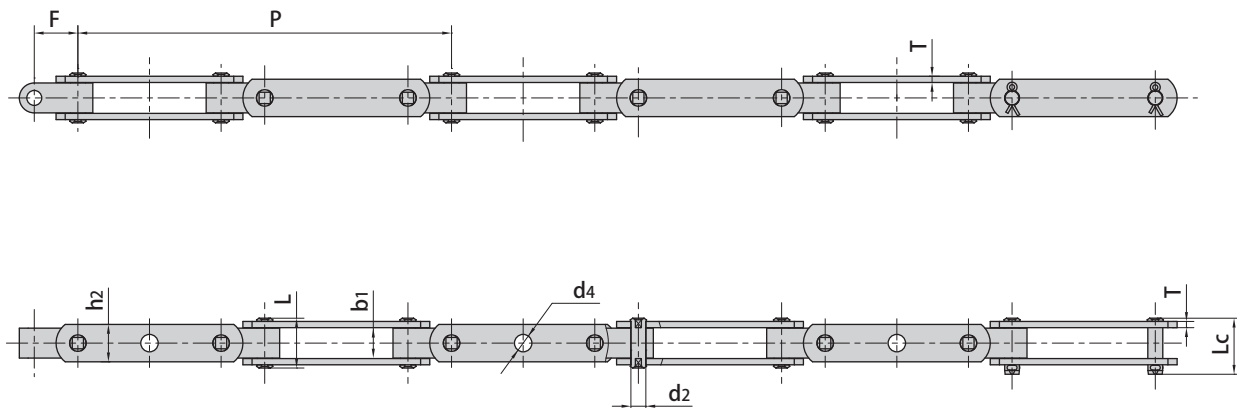

Donghua Chain No.	Pitch	Width between outer plates	Pin diameter	Pin length		plate depth	plate thickness	Attachment dimension		Ultimate tensile strength	Average tensile strength	Weight per meter
	P mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	T max mm	F mm	d4 mm	Q min kN/lbf	Q0 kN	q kg/m
SJ250F3	250.0	24.6	12.0	40.0	45.0	30.0	5.0	35.0	14.0	90/20230	94.0	4.41
SJ250F4	250.0	31.0	16.0	48.0	53.0	35.0	6.0	35.0	18.0	150/33720	160.0	6.90
SJ300F3	300.0	24.6	12.0	40.0	45.0	30.0	5.0	35.0	14.0	90/20230	94.0	4.02
SJ300F4	300.0	31.0	16.0	48.0	53.0	35.0	6.0	35.0	18.0	150/33720	160.0	6.22