


Hollow pin leaf chains

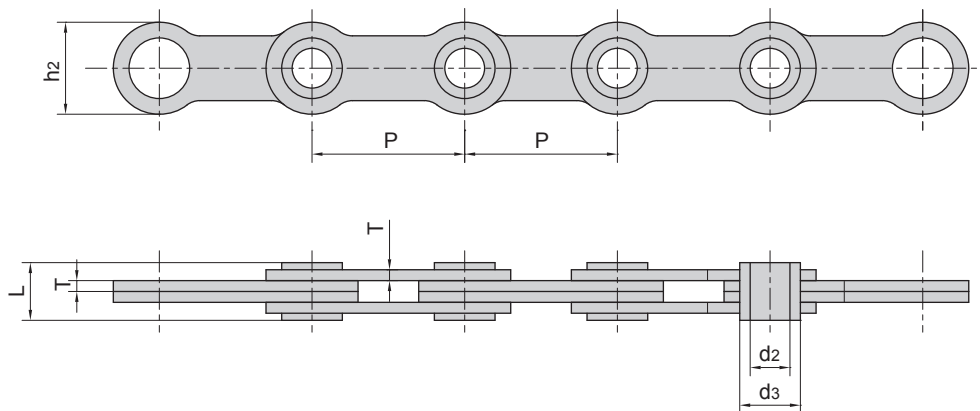

Donghua Chain No.	Pitch	Plate lacing	Plate depth	Plate thickness	Pin diameter		Pin length	Ultimate tensile strength	Average tensile strength	Weight per meter
	P mm		h2 max mm	T max mm	d2 min mm	d3 max mm	L max mm	Q min kN/lbf	Q0 kN	q kg/m
FL36	36.513	2×2	22.3	2.03	10.2	14.4	12.0	20.0/4496	25.0	0.85
FL36F2	36.513	2×2	24.0	2.50	9.5	14.9	15.0	30.0/6744	37.5	1.19
FL36F3	36.513	2×2	24.0	2.50	10.0	14.9	15.0	30.0/6744	37.5	1.16
*FL36F4	36.513	2×2	23.6	2.60	8.2	11.0	16.6	15.0/3372	30.0	1.25
FL36F6	36.513	2×2	22.0	2.60	9.5	14.5	14.5	35.0/7868	37.5	1.15
FL36F7	36.513	2×2	22.4	2.60	9.6	13.0	14.7	31.0/6969	40.5	1.05
FL36F8	36.513	2×2	23.6	2.60	10.0	13.0	16.6	15.0/3372	30.0	1.25

Note: * means the hollow pin with bushing